


SPECIFICATIONS



DL Series Dynalift

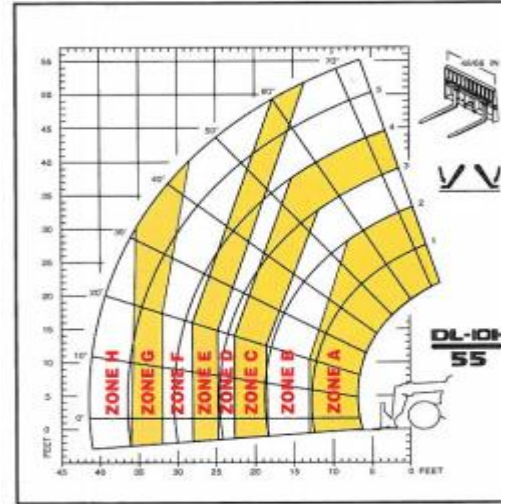

DL SERIES Dynalift®

With Gehl's new DL Series Dynalift, you can choose a boom profile to match your operation's needs. The high boom profile is often preferred when working in tight spaces, while the low boom profile is growing in popularity due to the broader view it offers.



Load Zone /Max. Lift Capacity

Charts based on a 24" load center
per ANSI B56.6 - 1992

DL-10H 55 FT. BOOM WITH OUTRIGGERS UP / DOWN

A	10,000 Lbs.	/	10,000 Lbs.
B	8,000 Lbs.	/	8,000 Lbs.
C	6,000 Lbs.	/	6,000 Lbs.
D	5,000 Lbs.	/	5,500 Lbs.
E	4,000 Lbs.	/	5,000 Lbs.
F	3,000 Lbs.	/	4,000 Lbs.
G	2,000 Lbs.	/	3,000 Lbs.
H	1,000 Lbs.	/	2,000 Lbs.
I	500 Lbs.	/	NA
J	250 Lbs.	/	NA

10L/10H 44 FOOT BOOM

10L/10H 55 FOOT BOOM

DIMENSIONS, MEASURES, & WEIGHTS

	FT./IN.(m)	20'10" (6.25)	/	20'7" (6.2)	21'2" (6.35)	/	20'10" (6.25)
Overall Length (less forks)	FT./IN.(m)	7'11" (2.4)	/	7'11" (2.4)	7'11" (2.4)	/	7'11" (2.4)
Overall Height	FT./IN.(m)	8'3" (2.5)	/	8'3" (2.5)	8'3" (2.5)	/	8'3" (2.5)
Ground Clearance	FT./IN.(m)	16" (.4)	/	16" (.4)	16" (.4)	/	16" (.4)
Outside Turning Radius	FT./IN.(m)	12'2" (3.7)	/	12'2" (3.7)	12'2" (3.7)	/	12'2" (3.7)
Wheel Base	FT./IN.(m)	10'8" (3.3)	/	10'8" (3.3)	10'8" (3.3)	/	10'8" (3.3)
Fuel Capacity	Gal (l)	30 (113.5)	/	30 (113.5)	30 (113.5)	/	30 (113.5)
Hydraulic Oil Reservoir Capacity	Gal (l)	45 (170.3)	/	45 (170.3)	45 (170.3)	/	45 (170.3)
Total Weight	LB(kg)	25,400 (11,520)	/	25,400 (11,520)	28,460 (12,936)	/	28,460 (12,936)

LIFT PERFORMANCE

	LB(kg)	10,000 (4,535)	/	10,000 (4,535)	10,000 (4,535)	/	10,000 (4,535)
Rated Capacity	FT./IN.(m)	44' (13.2)	/	44'3" (13.3)	55' 1" (16.53)	/	55' 1" (16.53)
Maximum Lift Height	LB(kg)	8,000 (3,628)	/	8,000 (3,628)	5,500 (2,500)	/	5,500 (2,500)
Max. Lift Capacity @ Max. Lift Height	FT./IN.(m)	29'6" (8.9)	/	30'6" (9.2)	40'9" (12.23)	/	40'9" (12.23)
Maximum Forward Reach	LB(kg)	2,000 (907)	/	2,000 (907)	2,000 (907)	/	2,000 (907)
Max. Lift Capacity @ Max. Fwd. Reach							

LOADER PERFORMANCE

	LB(kg)	14,000 (6,350)	/	14,000 (6,350)	NA	/	NA
Breakout Force	FT./IN.(m)	42'5" (12.7)	/	42'11" (12.9)	NA	/	NA
Maximum Dump Height	FT./IN.(mm)	2'9" (825)	/	2'3" (675)	NA	/	NA
Max. Forward Reach @ Max. Dump Height	Degree	23	/	24	NA	/	NA
Dump Angle @ Max. Dump Height	FT./IN.(m)	43'11" (13.2)	/	44'2" (13.3)	NA	/	NA
Maximum Loadover Height	FT./IN.(m)	33' (9.9)	/	34' (10.2)	NA	/	NA
Max. Dump Height @ 45 Degree Dump Angle	FT./IN.(m)	15' (4.5)	/	14'3" (4.3)	NA	/	NA
Max. Forward Reach @ 45 Degree Dump Height	Degree	30	/	30	NA	/	NA
Rollback @ Ground Level	Degree	132	/	132	NA	/	NA
Total Bucket Rotation							
Parallel Lift		Standard	/	Standard	Standard	/	Standard