


**PFL & PFLE Series**


Specifications & Capacities								
Model Numbers	PFL			PFL & PFLE				
	2042	3042	3048	4548	5548	5560	6448	6460
Side Step								
Universal Quick Attach Hitch	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Euro Hitch	N/A*	N/A*	N/A*	No	No	No	No	No
Weight lbs (kg)								
Universal Quick Attach Hitch	330 (149.7)	340 (154.2)	358 (162.4)	N/A	436 (197.8)	482 (218.6)	686 (311.2)	744 (337.5)
Euro Hitch	N/A*	N/A*	N/A*	422 (194.4)	446 (202.3)	492 (223.2)	683 (309.8)	741 (336.1)
Lift Capacity lbs (kg)	2100 (952.5)	3000 (1360.8)		4500 (2041.2)	5500 (2494.8)		6400 (2903)	
in (cm)	Lift capacity is based on load being 24 (61) from face of Frame (Cross bar). Load must be palletized and supported by two forks.							
Class	II		II		II		III	
Frame Width in (m)	45 7/8 (1.17)		45 7/8 (1.17)		45 7/8 (1.17)		60 1/2 (1.54)	
Frame Height in (m)	37 1/2 (.95)		37 1/2 (1.02)	40 (1.02)	40 (1.02)		41 1/8 (1.04)	
Tine Thickness in (cm)	1 (2.5)	1 1/4 (3.2)	1 1/4 (3.2)	1 1/2 (3.8)	1 3/4 (4.4)		1 3/4 (4.4)	
Tine Width in (cm)	3 (8)	4 (10)	4 (10)		4 (10)		4 3/4 (12)	
Tine Length in (m)	42 (1.07)		48 (1.22)		48 (1.22)	60 (1.52)	48 (1.22)	60 (1.52)
Fork Positioning Lock	Spring Loaded Toggle							

\* Euro Style Hitch is not available with this model

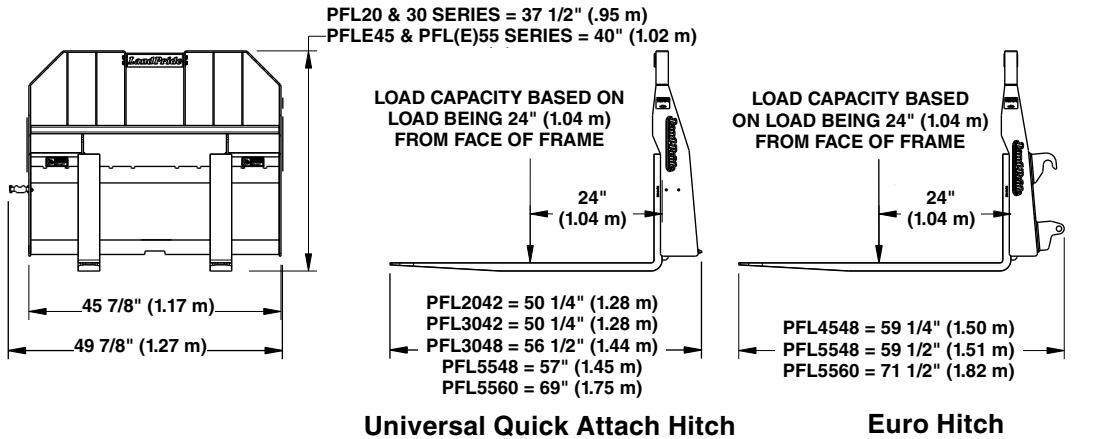

**Class II: PFL20, PFL30, PFLE45, & PFL55 Series**

35798

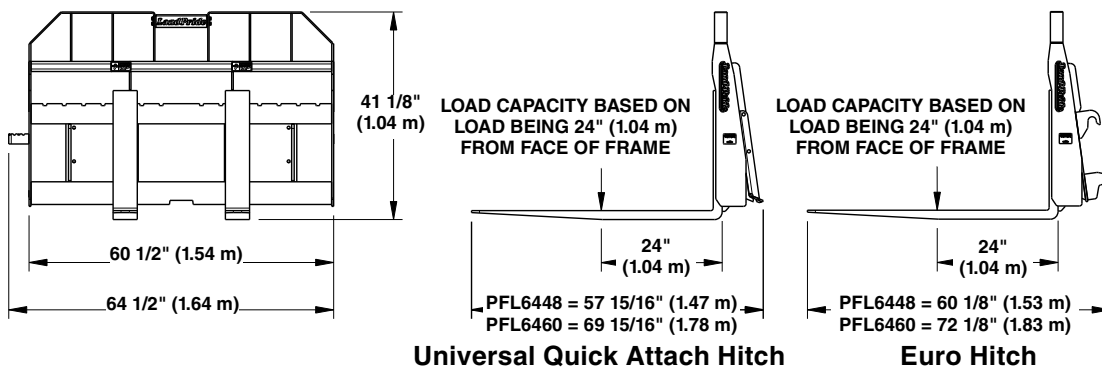

**Class III: PFL64 Series**

35799